


# Extension Spring Safety Cable Installation

9-07

**1. CONNECT THE SAFETY CABLE TO THE BACK HANG:**  
**MAKE A LOOP WITH THE SAFETY CABLE AROUND THE BACK HANG CONNECTED TO THE EYE-BOLT. INSTALL THE SAFETY CABLE INTO THE EXTENSION SPRING LENGTHWISE.**




**NOTE: TO INSURE PROPER OPERATION OF THE SPRING, MAKE SURE THE SAFETY CABLE IS ON THE OUTSIDE OF THE PULLEY ATTACHED TO THE SPRING.**

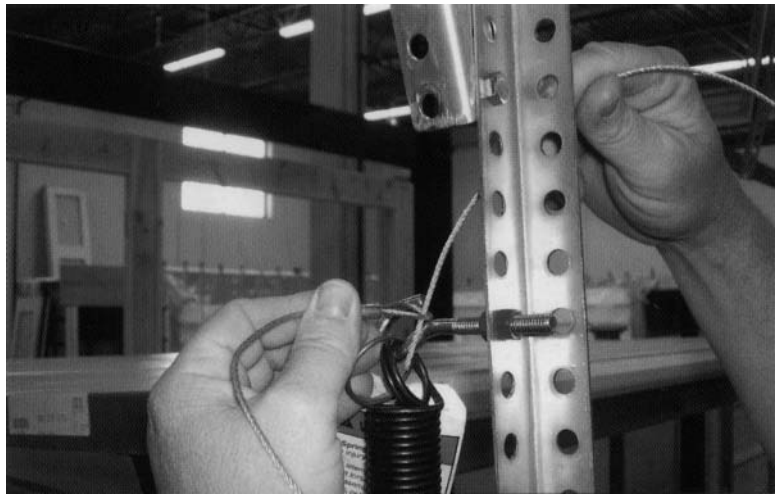

**2. CONNECT THE SAFETY CABLE TO THE HORIZONTAL ANGLE:**

**USING THE TWO SMALL HOLES IN THE HORIZONTAL ANGLE, INSTALL THE END OF THE SAFETY CABLE THROUGH THE TOP OF THE INNERMOST SMALL HOLE, AND PULL THE CABLE TIGHT.**

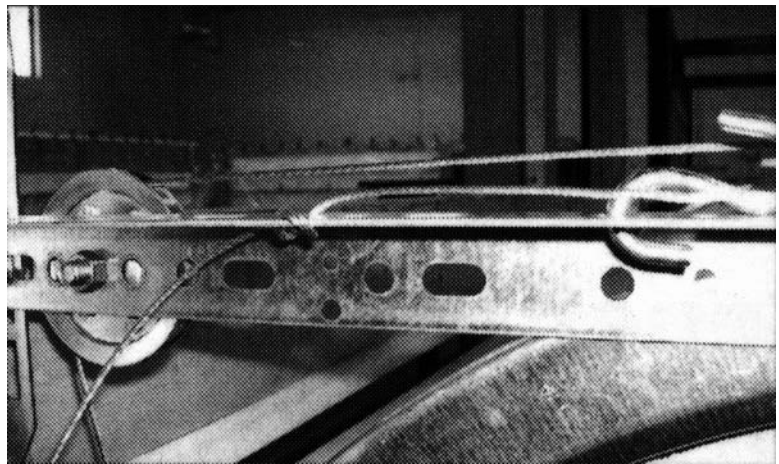

**THEN INSTALL THE END OF THE SAFETY CABLE BACK THROUGH THE OUTERMOST SMALL HOLE MAKING A SMALL LOOP IN THE CABLE. INSTALL THE END OF THE SAFETY CABLE THROUGH THE LOOP AND PULL THE CABLE TIGHT TO CLOSE THE LOOP.**

**THE SAFETY CABLE IS NOW PROPERLY TIED OFF TO THE HORIZONTAL ANGLE**



**NOTE: THE SAFETY CABLE SHOULD BE ATTACHED TO THE HORIZONTAL ANGLE AFTER THE LIFT CABLE HAS BEEN ATTACHED TO THE HORIZONTAL ANGLE.**