



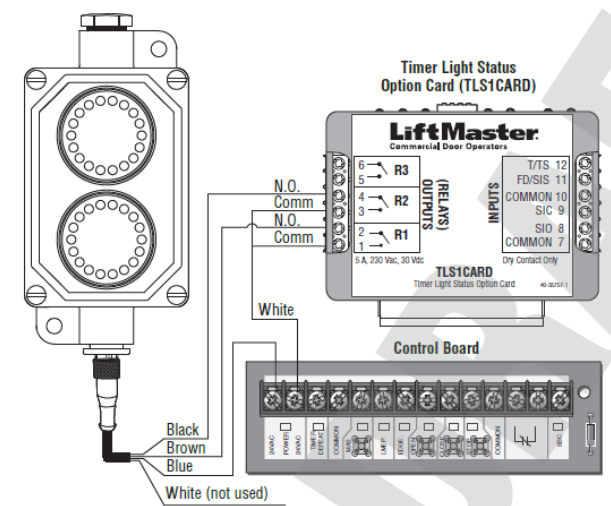

Compact Hi-Intensity Traffic & Signal Light

Designed for indoor and outdoor applications where signal and traffic control are required. Hi-Intensity Red/Green beams deliver a controlled field of view that's ideal for use by Fire Stations, Auto Sales and Service Centers, Municipalities, Parking Facilities, Drive Through lanes, etc.


DIMENSIONS

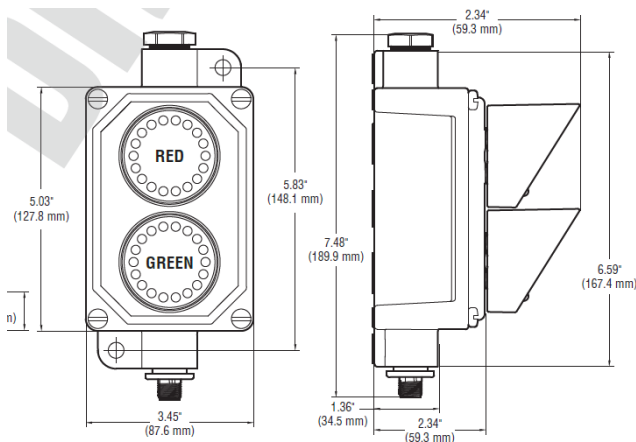

RGL-CTL Hi-Intensity Red/Green Traffic Light

- IP65/(NEMA 4) ENCLOSURE
- POLYCARBONATE HOUSING/COVER
- SEALED 18LED RED & GREEN LENSES
- 4-PIN CONNECTOR W/CABLE
- DAYLIGHT VISIBILITY

VIEWING ANGLE

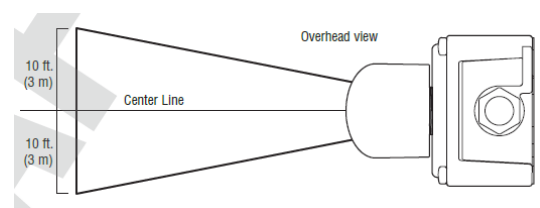

The maximum intensity of the Traffic Light is at approximately +10 ft. / -10 ft. of the center line, and falling off with the increase in distance.

SPECIFICATIONS

- Required Voltage 15VDC to 30VDC
- Current Draw 40 mA max. Per LED color (80mA Total Draw)
- LED Lenses Fully Encapsulated
- Cable 4-Pin Connector w/6.5 ft. Pig Tail
- Operating Temps -40° to +122° F (-40° to +50° C)
- Mounting Wall Mounting or 1/2" NPT Thread

LiftMaster RGL-CTL / RGL24LY Comparison Sheet

Model	RGL-CTL	RGL24LY
Traffic and Signal Lights		
Product Type	Traffic & Signal Light	Traffic & Signal Light
Light Colors	Red/Green	Red/Green
Type of Light Output	Hi-Intensity	General Purpose
Light Pattern (Visibility)	Narrow Angle	Wide Angle
Type of Lights	LED	LED
LEDs per color	18	10
Required Voltage	15 - 30VDC	24VDC
Power Draw	0.08 Amps/80 mA	0.30 Amps/300mA
Lens Diameter	2"	4-1/4"
Sun Shade	Yes	Yes
Body Colors	Safety Yellow Body/Black Face	Safety Yellow
Body Type	Polycarbonate	Polypropylene
	Fully Encapsulated	Gasket Seal
Environment Rating	IP65	IP54
Environment Use	Indoor/Outdoor	Indoor/Outdoor
EMI/RFI Interference	Immune	N/A
Outside Dimensions	7-1/2" x 3-1/2" x 4-1/4"	11-3/8" x 6-3/4" x 3-3/4"
Weight	1.5 lbs.	2 lbs.
Wiring	Pin Connector w/6 ft. Pigtail	3-Wire w/Pigtails
Light Switching Included	No	No
Required for Switching		
Logic 5.0	TLS1Card	TLS1Card
Logic 4.0	TLS1Card	TLS1Card
Logic 3.0*	RDGRNCARD	RDGRNCARD
Mounting	Through Body Mounting Holes or 1/2"NPT thread	Through Body Brass Islets or 1/2"EMT-fitting provided
Light Visibility		
Indoor	Very Good	Very Good
Outdoor	Very Good	Good
Temperature Rating	-40° to +50° C (-40° to +122° F)	
Recommended Applications		
Warehouse Docks	Yes	Yes
Automotive Centers	Yes	Yes
Fire Stations	Yes	Yes
Municipal Facilities	Yes	Yes
Parking Garages	Yes	Yes
Drive Through Lanes	Yes	Yes
Car Washes	Yes	Yes

*Some late model Logic 3 operators utilize the TLS1Card. Consult the LiftMaster Technical Services Department.



NEW PRODUCT RELEASE

CDO

Product: RGL-CTL

Description: Hi-Intensity Red & Green Traffic Light

Dear LiftMaster Sales Team:

LiftMaster CDO is pleased to announce the New **RGL-CTL Red/Green Traffic and Signal Light**. This compact Accessory delivers Hi-Intensity light for single or narrow lane applications.

With a powerful stream of light from 18 LEDs per color, the RGL-CTL provides signal visibility for Fire Stations, Automotive Service Centers, and other applications where a concentrated, focused source of light is required to protect people, property and equipment.

It complements our existing RGL24LY R/G Light that provides a wider broadcast of color for visibility across garage bays and other open areas.

Please see the attached product sheet for more information on the RGL-CTL. We've also include a comparison chart to help you specify the best light for the intended application.

