

# DD08900W LIGHT-DUTY COMMERCIAL JACKSHAFT DOCK DOOR OPERATOR FOR SECTIONAL DOORS



## SECTION 08 71 13

### KEY FEATURES

<b>STANDARD APPLICATION</b>	Ideal for applications using smaller, lighter commercial sectional doors on high-lift and full vertical lift with light-duty cycle requirements
<b>RATED DUTY CYCLE</b>	Light-duty: Up to 10 cycles/hour; fewer than 25 cycles per day
<b>OPERATOR SPEED</b>	7.5-8.5 Inches per second
<b>LIMIT SETTINGS</b>	Electronic
<b>EMERGENCY DISCONNECT FOR MANUAL OPERATION</b>	Emergency release sash chain
<b>EMERGENCY DISCONNECT WITH AUTO-RECONNECT</b>	To reconnect, pull down on the sash chain again to re-engage
<b>PROGRAMMING</b>	Tactile buttons
<b>CIRCUIT BOARD</b>	Solid-state circuit board
<b>MOTOR OPERATOR WALL CONTROL</b>	3-button control station
<b>COMMERCIAL INPUTS</b>	Flasher circuit and interlock
<b>CONNECTIVITY INTERFACE</b>	LMi5 Interface Device monitors up to 5 external sensors (myQ® Business™ Facility subscription required for visibility to this data)

### SPECIFICATIONS

<b>RADIO RECEIVER</b>	Security+ 2.0® technology standard on-board with tri-band frequency; accepts up to (40) single button remote controls plus up to (4) wireless keypads or an unlimited number of DIP switch remotes
<b>VOLTAGE CONNECTIONS</b>	120VAC
<b>DRIVE REDUCTION</b>	Heavy-duty 12VDC
<b>WARRANTY</b>	2 years

### INSTALLATION FEATURES

<b>UNIVERSAL MOUNTING</b>	Yes, can be mounted to either the right or left side of the door without the need for any special accommodations
<b>MAXIMUM DOOR HEIGHT</b>	14 feet
<b>MAXIMUM DOOR WIDTH</b>	18 feet
<b>MAXIMUM ALLOWABLE SQUARE FOOTAGE</b>	180 square feet
<b>MAXIMUM DOOR WEIGHT</b>	300 lbs.
<b>INTERNET CONNECTIVITY</b>	myQ® Technology enables remote monitoring and control of the commercial door via a smartphone, tablet, or computer***

This commercial door operator must feature constant pressure to close or be equipped with an external monitored entrapment protection device. Use only LiftMaster monitored entrapment protection devices itemized on the accessory page of the operators installation manual to meet UL 325 requirements.

\*\*\*Operator directly connects via built-in wi-fi, subscription to myQ Business™ Facility required.

**DATA SHEET**  
JACKSHAFT DOCK DOOR OPERATOR  
FOR SECTIONAL DOORS


**LiftMaster**

# DD08900W LIGHT-DUTY COMMERCIAL JACKSHAFT DOCK DOOR OPERATOR FOR SECTIONAL DOORS

SECTION 08 71 13



## DIMENSIONS

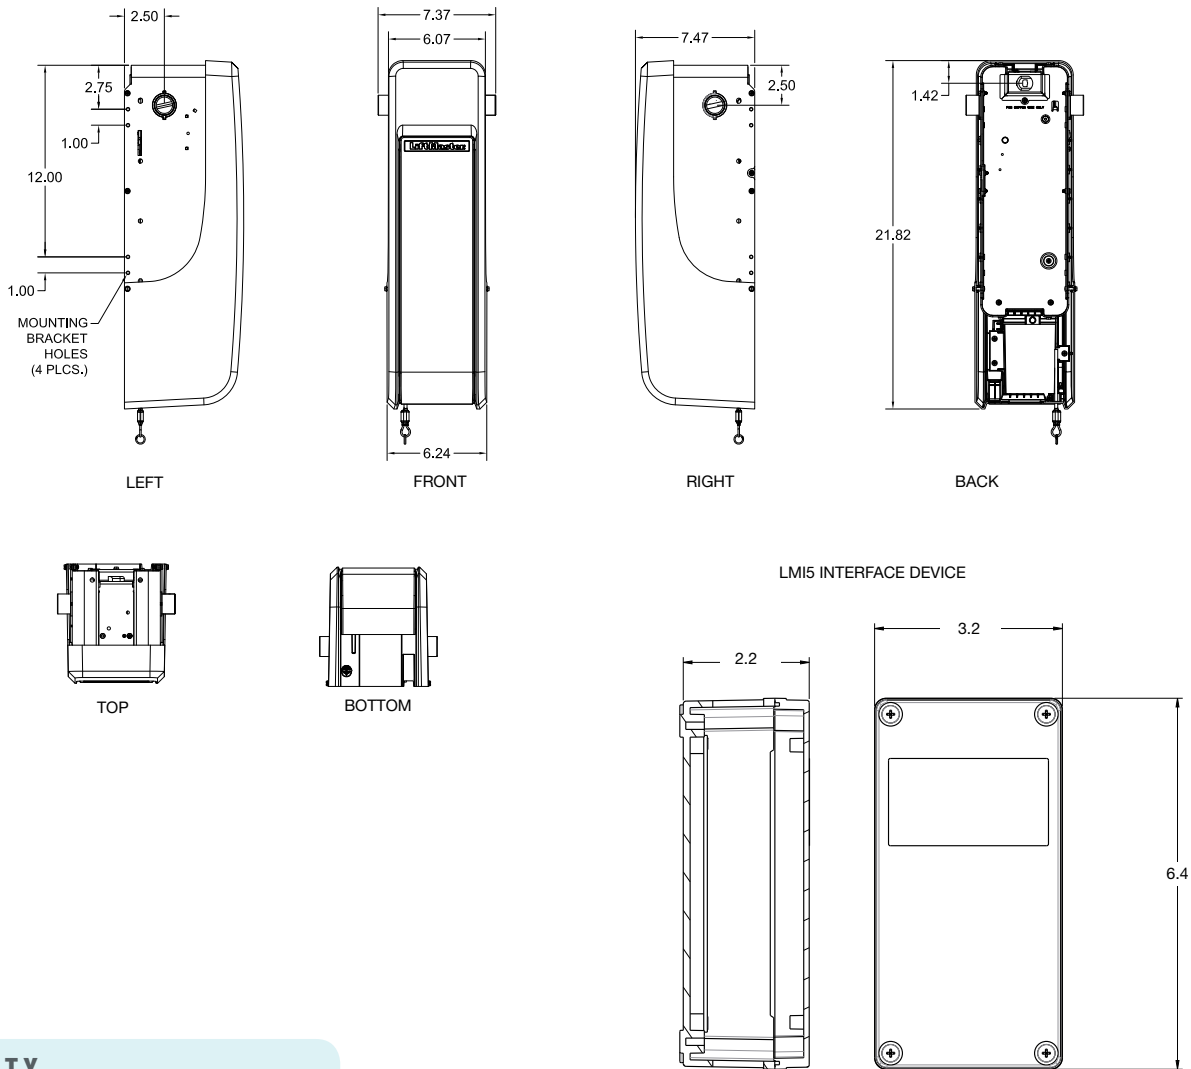

## CAPACITY

MAXIMUM DOOR AREA (SQ. FT.)			
	MAX. HEIGHT	MAX. WIDTH	MAX. SQ. FT.
SECTIONAL	14 FT. OR	16 FT.	180 FT. TOTAL
	HEADROOM CLEARANCE REQUIRED: 3 IN. FROM CENTER OF TORSION BAR MAX. DOOR WEIGHT: 300 LBS.		

Recommended duty cycle: 10 cycles per hour; fewer than 25 cycles/day.